


AluLock



Dimension

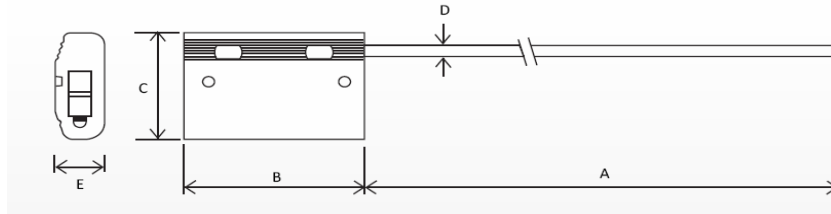

Type	A (mm) (inches)	B (mm) (inches)	C (mm) (inches)	D (mm) (inches)	E (mm) (inches)	Average Breaking Strength (kg & lb)	
AluLock 1.5	300 11.81	32 1.26	22 0.87	1.5 0.06	6 0.24	280	616
AluLock 2.5	300 11.81	32 1.26	22 0.87	2.5 0.10	8.8 0.35	600	1100
AluLock 3.5	300 11.81	32 1.26	22 0.87	3.5 0.14	8.8 0.35	1200	2640
AluLock 5.0	300 11.81	45 1.77	40 1.57	5.0 0.20	12 0.47	1900	4188

Specification

Material : Body - Anodised Aluminium

Temperature : -40 to 120°C / -40 to 240°F

Cable - Non Preformed galvanized steel aircraft cable


Format : Bags of 10

Packaging


Product	Qty per Carton		Inner Carton Dimensions – mm				Outer Carton Dimension—mm				Weight—kg	
	Inner Carton	Outer Carton	L	W	H	V(M ³)	L	W	H	V(M ³)	Inner Carton	Outer Carton
AluLock 1.5	250	1000	410	190	200	0.016	420	410	440	0.074	4.25	18.10
AluLock 2.5	250	1000	410	190	200	0.016	420	410	440	0.074	6.25	26.30
AluLock 3.5	250	1000	410	190	200	0.016	420	410	440	0.074	8.00	33.10
AluLock 5.0	100	400	410	190	200	0.016	420	410	440	0.074	TBA	TBA

Product	Qty per Carton		Inner Carton Dimensions – inches				Outer Carton Dimension—inches				Weight—lb	
	Inner Carton	Outer Carton	L	W	H	V(Ft ³)	L	W	H	V(Ft ³)	Inner Carton	Outer Carton
AluLock 1.5	250	1000	16.14	7.48	7.87	0.53	16.53	16.14	17.32	2.613	9.35	38.82
AluLock 2.5	250	1000	16.14	7.48	7.87	0.53	16.53	16.14	17.32	2.613	13.75	57.86
AluLock 3.5	250	1000	16.14	7.48	7.87	0.53	16.53	16.14	17.32	2.613	17.63	72.82
AluLock 5.0	100	400	16.14	7.48	7.87	0.53	16.53	16.14	17.32	2.613	TBA	TBA


Application




1. Loop the cable through the item to be sealed



2. Insert and pull the cable through the locking chamber



3. Pull the cable all the way through the body until item is tightly sealed, then pull at body to ensure seal is locked



4. Remove seal with the appropriate cable cutters (eyes protection is recommended)