


UnoLock



Dimension

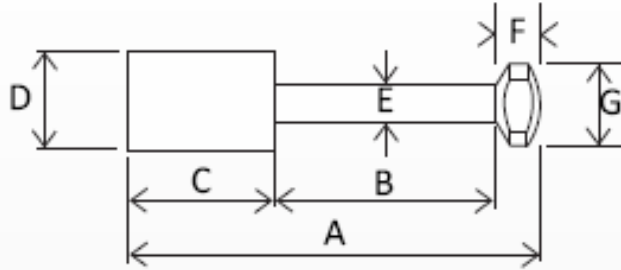

Type	A (mm) (inches)	B (mm) (inches)	C (mm) (inches)	D (mm) (inches)	E (mm) (inches)	F (mm) (inches)	G (mm) (inches)
UnoLock	96.3 3.79	52 2.05	34.20 1.35	24.8 0.98	8.5 0.33	10 0.39	20 0.79

Specification


Material : High grade steel, all components are zinc coated Tensile Strength : in excess of 1000kgs/2205lbs
 Format : Packages of 10
 Temperature : -40 to 110°C / -40 to 230°F

Packaging


Product	Qty per Carton		Inner Carton Dimensions – mm				Outer Carton Dimension— mm				Weight—kg	
	Inner Carton	Outer Carton	L	W	H	V(M ³)	L	W	H	V(M ³)	Inner Carton	Outer Carton
UnoLock	250	-	432	312	355	0.047	-				10.51	-

Product	Qty per Carton		Inner Carton Dimensions – inches				Outer Carton Dimension—inches				Weight—lb	
	Inner Carton	Outer Carton	L	W	H	V(Ft ³)	L	W	H	V(Ft ³)	Inner Carton	Outer Carton
UnoLock	250	-	17.00	12.28	13.97	2.472	-				23.17	-


Application



1. Place pin into barrel



2. Press down to seal



3. Use bolt cutter to remove